


Over/undervoltage monitoring relay HRN-54, HRN-54N

Advantages


- Serves to monitor voltage , phase failure and sequence in switchboards, protection of devices in 3-phase mains
- 1-module, DIN rail mounting
- It is possible to set upper and lower level of monitoring voltage
- Adjustable time delay eliminates short voltage peaks and failures in the mains
- Faulty state is indicated by red LED and by breaking output relay contact
- Output contact: 1x changeover 8 A /250 V AC1
- If the supply voltage falls below 60 % U_n (U_{off} lower level) the relay immediately breaks with no delay
- **HRN-54** - supply from all phases which means that the relay is functional also in case when one phase is faulty
- **HRN-54N** - supply L1-N, means that relay monitors also failure of neutral wire

Technical data		
	HRN-54	HRN-54N
Supply and measuring	L1,L2,L3	L1,L2,L3,N
Supply	L1,L2,L3	L1,N
Supply/measured voltage	3 x 400 V	3 x 400 V/ 230 V
Level U_{min}	75 - 95% U_n	
Level U_{max}	105 - 125% U_n	
Consumption	max. 2 VA	
Hysteresis	5 %	
Max. permanent overload	AC 3 x 460V	AC 3 x 265V
Peak overvoltage <1ms.	AC 3 x 500V	AC 3 x 288V
Time delayT1	max. 500 ms.	
Time delayT2	0.1 - 10 s.	
Output		
Number of contacts	1 x changeover (AgNi)	
Rated current	8 A / AC1	
Breaking capacity	2500 VA / AC1, 240W / DC	
Inrush current	10 A	
Switching voltage	max. 250 V AC1 / 24 V DC	
Min. breaking capacity DC	500mW	
Output indication	red LED	
Mechanical life	1x10 ⁷	
Electrical life	1x10 ⁵	
Reset time	max. 150 ms.	
Controlling		
Operating temperature	-20...+55 °C	
Storage temperature	-30...+70 °C	
Electrical strength	4 kV	
Operating position	any	
Mounting	DIN rail EN 60715	
Protection degree	IP 40 from front panel	
Overvoltage category	III.	
Pollution degree	2	
Max. cable size	2.5 mm ²	
Dimensions	90 x 17,6 x 64 mm	
Standards	EN 60255-6, EN 61010-1	

Connection

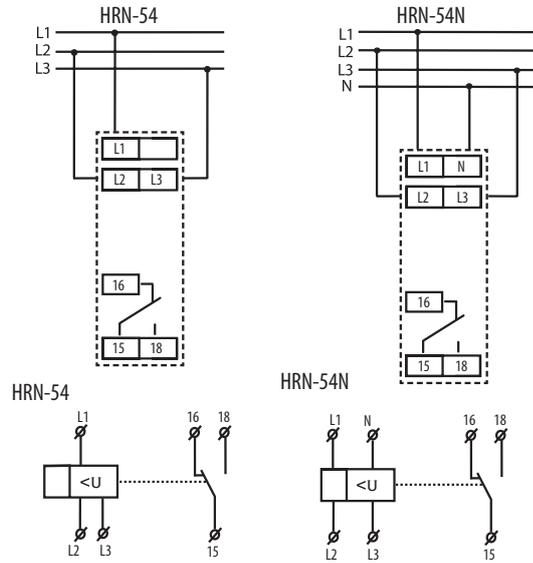

Functions

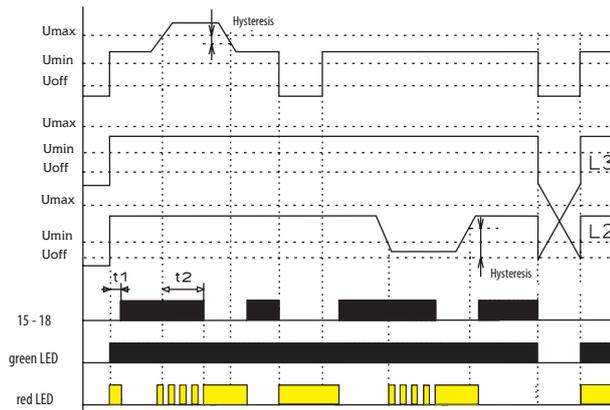

Function description

Relay in 3-phase main monitors size of phase voltage. It is possible to set two independent voltage levels and thus it is possible to set two independent voltage levels and monitor e.g. undervoltage and overvoltage independent. In normal state when voltage is within set levels, output relay is closed and red LED shines. In case voltage exceeds or falls below the set levels, output relay breaks and red LED shines (LED indicates faulty state – flashes when timing). In case of In case supply voltage falls below 60 % U_n (U_{OFF} , lower level) relay immediately breaks without delay and faulty state is indicated by red LED. In case timing is in progress and faulty state is indicated, timing is immediately stopped.

Description

