

# PRODUCT FAMILY DATASHEET

## SPOT MULTI 1x30W

Recessed mounted spotlight, swivelable with one spot



---

### AREAS OF APPLICATION

- Accent- and general lighting for all kind of salesrooms
- Fashion shops, accessories shops
- Shops, boutiques
- Hotel rooms
- Cafés

---

### PRODUCT BENEFITS

- Low flicker light thanks to special electronic control gear
- High luminous efficacy
- Covering against other ceiling installations thanks to closed sheet steel housing
- Easy replacement of external driver thanks plug with bayonet lock
- Functional and minimalistic design
- 5 years guarantee

---

### PRODUCT FEATURES

- Large faceted reflector for high light output
- Beam angle: 38°
- Gimbal adjustment angle: +/- 25°





TECHNICAL DATA

Product description	Electrical data			Photometrical data				Light technical data	Dimensions & weight		
	Nominal wattage	Nominal voltage	Mains frequency	Luminous flux	Light color (designation)	Color rendering index Ra	Luminous efficacy of lamp in luminaire	Beam angle	Length	Width	Height
SPOT MULTI 1 x 30W 3000K FL WT/BK <sup>1)</sup>	30.00 W	220...240 V	50/60 Hz	2700 lm	Warm White	>80	90 lm/W	38.00 °	173.0 mm	173.0 mm	135.0 mm
SPOT MULTI 1 x 30W 4000K FL WT/BK <sup>1)</sup>	30.00 W	220...240 V	50/60 Hz	2700 lm	Cool White	>80	90 lm/W	38.00 °	173.0 mm	173.0 mm	135.0 mm


Product description	Product weight	Colors & materials			Temperatures & operating conditions	Lifespan		
		Body material	Product color	Cover material	Ambient temperature range	Lifespan L70 at 25 °C	Lifespan L80 at 25 °C	Lifespan L90 at 25 °C
SPOT MULTI 1 x 30W 3000K FL WT/BK <sup>1)</sup>	1540.00 g	Aluminum	White	Polymethylmethacrylate (PMMA)	-10...40 °C	50000 h	45000 h	30000 h
SPOT MULTI 1 x 30W 4000K FL WT/BK <sup>1)</sup>	1540.00 g	Aluminum	White	Polymethylmethacrylate (PMMA)	-10...40 °C	50000 h	45000 h	30000 h

Product description	Capabilities			Certificates & standards	
	Adjustable	Dimmable	Type of connection	Protection class	Type of protection
SPOT MULTI 1 x 30W 3000K FL WT/BK <sup>1)</sup>	Yes	No	Terminal	II	IP20
SPOT MULTI 1 x 30W 4000K FL WT/BK <sup>1)</sup>	Yes	No	Terminal	II	IP20

<sup>1)</sup> Available from July 2018

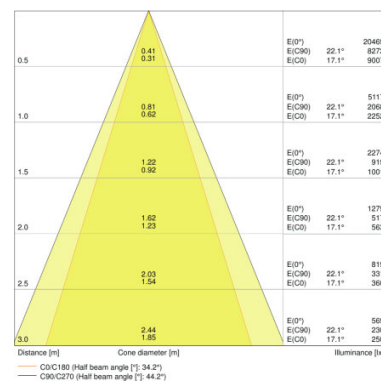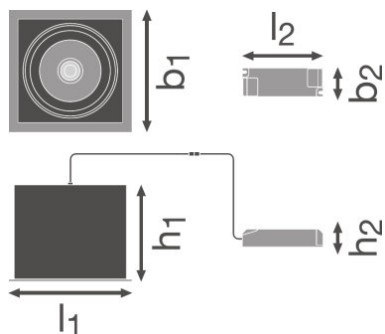

SPOT MULTI 1 x 30W 3000K FL WT/BK

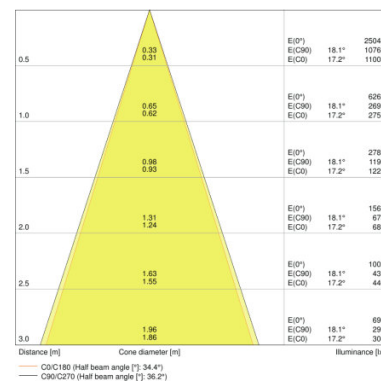

SPOT MULTI 1 x 30W 4000K FL WT/BK

SPOT MULTI 1 x 30W 3000K FL WT/BK,  
 SPOT MULTI 1 x 30W 4000K FL WT/BK

**EQUIPMENT / ACCESSORIES**

- Driver included

**APPLICATION ADVICE**

For more detailed application information and graphics please see product datasheet.

**LOGISTICAL DATA**

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075113923	SPOT MULTI 1 x 30W 3000K FL WT/BK	Shipping carton box 4	410 mm x 220 mm x 355 mm	32.02 dm <sup>3</sup>	6885.00 g
4058075113947	SPOT MULTI 1 x 30W 4000K FL WT/BK	Shipping carton box 4	410 mm x 220 mm x 355 mm	32.02 dm <sup>3</sup>	6885.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.