



140122.5L011.608 CARO 1 LED 8W 3000K IP65 22° gray

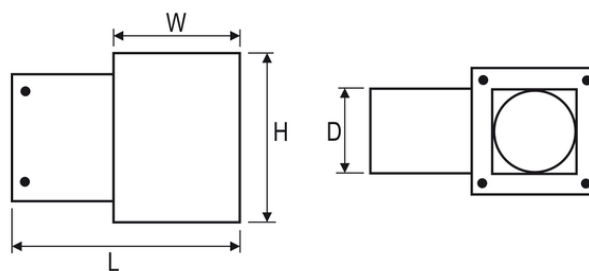
Decorative facade luminaire mainly for outdoor applications, featuring high quality LED light sources.

TECHNICAL DATA	Mounting: directly on the wall, directly on the wall Body: high pressure die-cast aluminum Colour: gray Mounting on flammable surfaces: yes
ELECTRICAL DATA	Power supply efficiency: >71% Power: 220-240V 50/60Hz Includes light source: yes Output current [mA]: 350 Type of equipment: ED Light source / lamp: LED Electrical connection: max 3x2,5 mm ² wire
OPTICAL DATA	Light distribution: circular Way of lighting: direct Diffuser: glass CRI/Ra: ≥80 Beam angle: 22° Lumen LED [lm]: 670 Lumen luminaire [lm]: 450 Colour temperature [K]: 3000
GENERAL DATA	Lifetime (L80B10): 50 000 h Operating temperature range: -30°C ... +40°C Warranty: 5 years Application: facades, hotels, shopping centers, restaurants, museums



Code	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Beam angle
140122.5L011.608	8	450	56	3000	≥80	22°

Code	Dimensions [mm] L W H D	Mounting dimensions [mm] H D	Pallet quantity	Quantity in package	Net weight [kg]
140122.5L011.608	270 150 200 100	80 60	112	1	3,2

**LIGHT BEAM CURVES****WAY OF LIGHTING**