


# Product data sheet

## USB charger

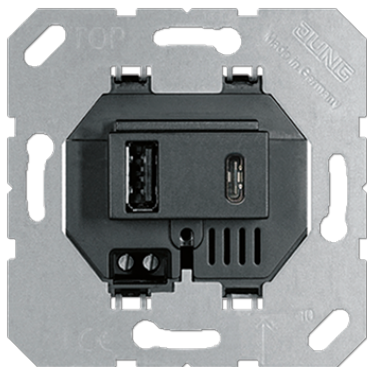

### Reference number

USB 15 CA SW

### USB charger

with 1 USB port type A and 1 USB port type C  
screw fixing only, without claws

### Intended use

- Battery charging station for mobile devices with USB connection
- Installation in flush box according to DIN 49073

### Product characteristics

- Simultaneous charging of 2 devices possible
- Installation into multiple frame with other devices possible
- Charging current: max. 3000 mA

### Centre plates:

AS / A ranges: ref.-no. A 1569 USB ..

CD range: ref.-no. CD 569 T ..

SL range: ref.-no. SL 569 T ..

LS range: ref.-no. .. 1969 USB ..

### Hinged lids with symbol:

CD range: ref.-no. CD 590 KL USB ..

LS range: ref.-no. LS 990 BFKL USB .., .. 2990 KL USB ..

### Technical data

Input voltage:	AC 100 ... 240 V ~ ± 10 %
Mains frequency:	50/60 Hz
Ambient temperature:	0 ... +35 °C
Storage/transport temperature:	-20 ... +70 °C
Stand-by power consumption at UIN = 230 V ~:	≤ 0.1 W
Connection mode:	screw terminals
Output voltage:	DC 5 V (± 5 %)
Output current	
AC 120 ... 240 V ~	max. 3000 mA
AC 90 ... 108 V ~	max. 2500 mA

### Colour:

black