

Floor sockets




0 897 02 (equipped)

Pack	Cat.Nos	Receptacles for floor sockets
		<p>Extra slim plate IP 44 - IK 08 Equipped with a 180° opening flap Extra flat finish: thickness 2 mm Lighting base of receptacle by white LED To be equipped with 2 modules square version Arteor or Mosaic functions:</p> <ul style="list-style-type: none"> - socket outlets without cover, German, Euro-US, Swiss, Danish, Israeli and French standards - Double USB chargers - RJ 11 and RJ 12 sockets - Television sockets - RJ 45 sockets UTP, FTP and STP without controlled access - loudspeaker sockets - HDMI sockets - HD 15 sockets without jack
1	0 897 00	Square receptacle
1	0 897 10	● Stainless steel
1	0 897 50	● Golden brushed ● Brushed brown steel
1	0 897 01	Round receptacle
1	0 897 11	● Stainless steel
1	0 897 51	● Golden brushed ● Brushed brown steel
1	0 897 02	Rectangular receptacle
1	0 897 12	● Stainless steel
1	0 897 52	● Golden brushed ● Brushed brown steel
Boxes and accessories		
6	0 819 88	<p>Floor box Flush-mounting box for concrete slab (50 to 80 mm thick) or raised access floor (10 to 40 mm thick) using saw Cat.No 0 800 88</p>
		<p>ø80 mm Can be joined to make multi-gang assemblies</p>
1	0 800 88	<p>Hole saw ø80 mm</p>
10	0 897 19	<p>Indicator light with white LED for floor socket Used to backlight the outline of the socket for easier location</p>
10	0 801 88	<p>Box for wall or furniture Multimaterial simple Batibox flush-mounting box ø80 mm Used to install the floor socket in any type of partition or on furniture (such as a work surface) Depth 50 mm</p>
1	0 897 09	<p>Kit consisting of 10 long screws and 30 blanking plates for positioning on the socket outlets Used to equip 5 sockets For use where there are thick coverings (such as carpets) in order to fix the plate to the box Cat.No 0 819 88 or 0 801 88</p>


Floor sockets

Installation in concrete or technical floor

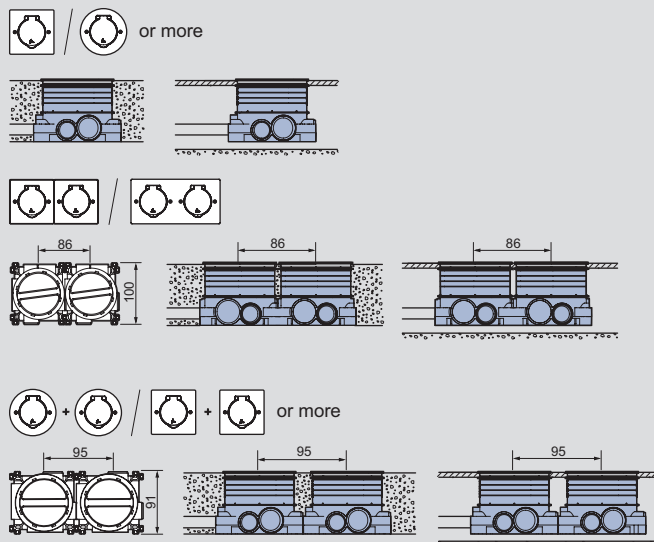


Dimensions

Single sockets

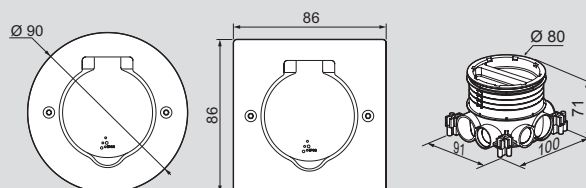

Double sockets

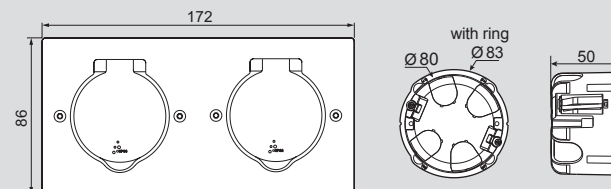

Technical characteristics

Protection index

IP 44/ IK 08 : closed flap
 Cover open at 180°

Material

Stainless steel / Golden brushed
 Zamak
 Fixing screw : Torx type T10 stainless steel