




Nailing clips

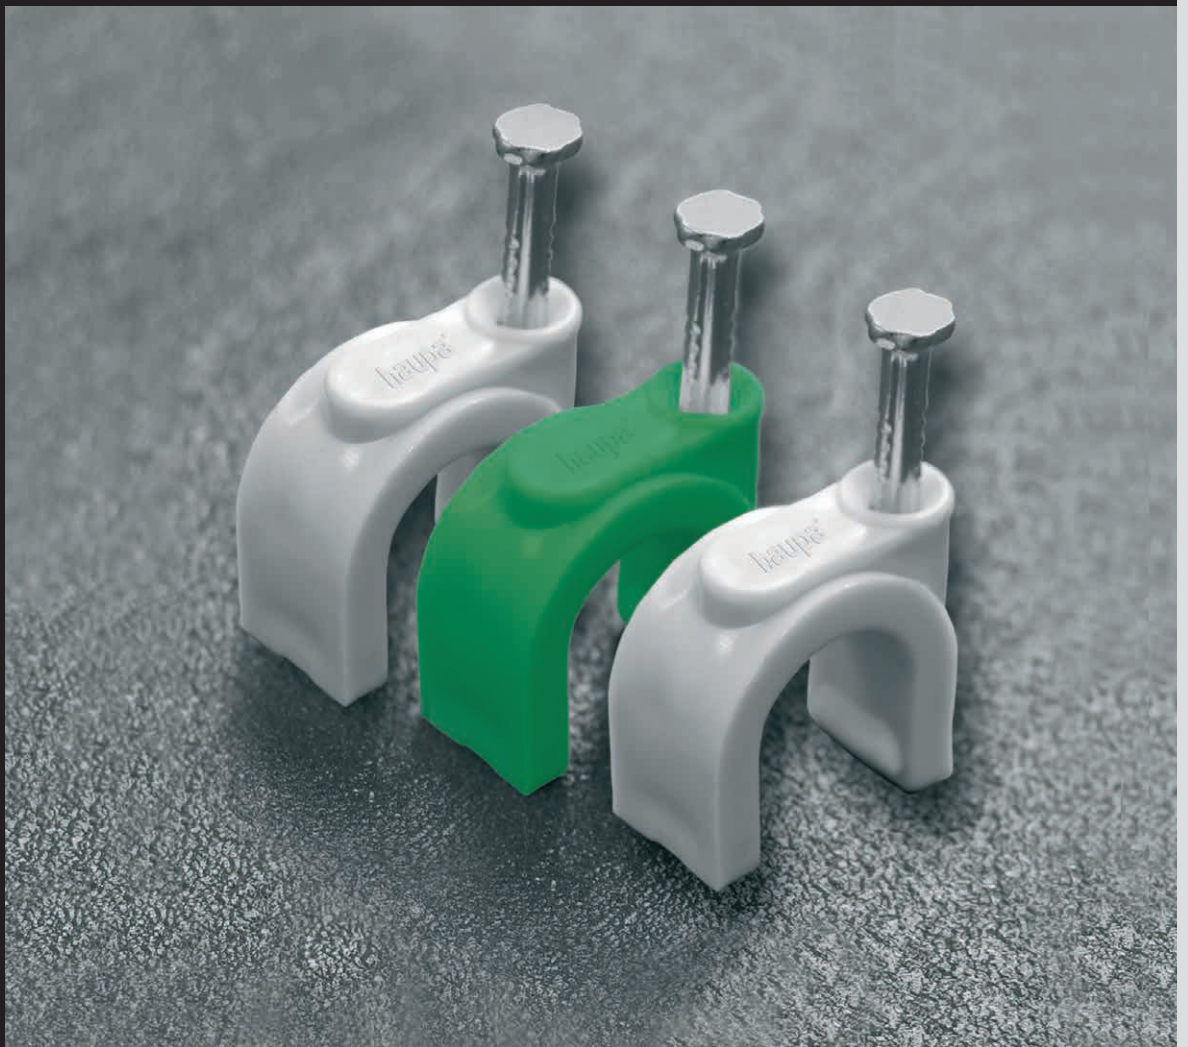

INFO


Nailing clips

Material: hammer-proof polyethylene (PE) halogen-free
 Temperature resistant: - 40 °C to + 80 °C, and for short periods up to approximately 100 °C



Nailing clips for round cable


for attaching and fixing electrical cables, optimum claw shape for secure fixing of the cable, can be fixed to the cable, version with inserted galvanised nail, material: hammer-proof polyethylene (PE), halogen-free, temperature resistant: - 40 °C to + 80 °C, and for short periods up to approximately 100 °C.



Art. no.	colour	∅	H	H1	W	NL	ND	kg/100	PU
262200	transparent	2-3	4,3	2,8	2,8	19	1,65	0,032	100
262202	transparent	3-5	5,6	3,7	2,9	15	2,0	0,038	100
262204	pure white	3-5	5,6	3,7	2,9	15	2,0	0,038	100
262206	black	5-7	8,0	6,0	5,3	20	2,0	0,100	100
262208	transparent	5-7	8,0	6,0	5,3	20	2,0	0,100	100
262209	light grey	5-7	8,0	6,0	5,3	35	2,0	0,100	100
262210	pure white	5-7	8,0	6,0	5,3	20	2,0	0,102	100
262212	black	7-10	9,5	7,1	6,8	25	2,0	0,093	100
262214	brown	7-10	9,5	7,1	6,8	25	2,0	0,092	100
262215	grey	7-10	9,5	7,1	6,8	35	2,0	0,092	100
262216	red	7-10	9,5	7,1	6,8	25	2,0	0,093	100
262218	pure white	7-10	9,5	7,1	6,8	25	2,0	0,092	100
262219	light grey	8 - 12	9,5	7,1	6,8	35	2,0	0,120	100
262220	black	10-14	13,0	10,3	9,4	35	2,0	0,166	100
262222	pure white	10-14	13,0	10,3	9,4	35	2,0	0,162	100
262223	light grey	10-14	13,0	10,3	9,4	44	2,0	0,162	100
262224	black	14-20	17,1	13,7	13,1	40	2,5	0,136	50
262226	pure white	14-20	17,1	13,7	13,1	40	2,5	0,138	50
262227	light-grey	14-20	17,1	13,7	13,1	44	2,5	0,138	100
262228	black	18-22	19,5	17,0	16,4	38	3,2	0,402	50
262230	pure white	18-22	19,5	17,0	16,4	38	3,2	0,396	50
262231	light grey	18 - 22	19,5	17	16,4	45	2,0	0,396	50
262232	black	22-26	21,0	19,5	24,0	38	3,2	0,464	50
262234	pure white	22-26	21,0	19,5	24,0	38	3,2	0,458	50
262235	light grey	22 - 26	21,0	19,5	24,0	38	3,2	0,458	50

Nailing clips for flat cable

for attaching and fixing electrical cables, optimum claw shape for secure fixing of the cable, can be fixed to the cable, version with inserted galvanised nail, material: hammer-proof polyethylene (PE), halogen-free, temperature resistant: - 40 °C to + 80 °C, and for short periods up to approximately 100 °C.




Art. no.	colour	∅	H	H1	W	NL	ND	kg/100	PU
262236	transparent	2-4	4,0	2,0	4,0	15	2,0	0,032	100
262238	transparent	3-5	5,2	3,3	4,6	15	2,0	0,038	100
262240	transparent	4-6	5,9	3,8	5,8	15	2,0	0,047	100
262242	light grey	5-8	7,5	4,9	7,9	25	2,0	0,107	100
262243	pure white	5-8	7,5	4,9	7,9	25	2,0	0,103	100
262244	light grey	6-10	8,2	5,8	9,8	25	2,0	0,120	100
262245	pure white	6-10	8,2	5,8	9,8	25	2,0	0,120	100
262246	light grey	7-14	9,3	6,5	11,8	25	2,0	0,176	100
262247	pure white	7-14	9,3	6,5	11,8	25	2,0	0,174	100
262248	light grey	9-18	12,2	9,4	16,7	22	2,5	0,237	100
262249	pure white	9-18	12,2	9,4	16,7	22	2,5	0,236	100

- NL = nail length
- N-∅ = nail diameter
- H = height
- H1 = height 1
- W = width (opening)

Nailing clips

Nailing clips for round cable


for attaching and fixing electrical cables, version with inserted galvanised nail, material: hammer-proof polyethylene (PE), halogen-free, temperature resistant: - 40 °C to + 80 °C, and for short periods up to approximately 100 °C.



Art. no.	colour	Ø	W	NL	ND	kg/100	PU
262254	light grey	4,1	4,1	15	2,0	0,083	100
262256	light grey	4,1	4,1	20	2,0	0,089	100
262258	light grey	7,0	7,0	20	2,0	0,103	100
262260	light grey	9,0	9,0	20	2,0	0,178	100
262262	light grey	13,2	13,2	20	2,0	0,225	100

ISO nailing clips

for attaching and fixing electrical cables, can be fixed to the cable, version with inserted galvanised nail, material: hammer-proof polyethylene (PE), halogen-free, temperature resistant: - 40 °C to + 80 °C, and for short periods up to approximately 100 °C.



Art. no.	colour	Ø	H	H1	W	NL	ND	kg/100	PU
262264	light grey	2,75	4,5	2,6	2,75	20	2,0	0,083	100
262266	light grey	6,0	9,0	6,6	6,0	20	2,0	0,100	100
262268	light grey	8,0	12,9	9,0	8,0	25	2,0	0,131	100
262270	light grey	9,0	12,0	9,0	9,0	22	2,0	0,132	100
262272	light grey	10,0	13,8	10,4	9,3	25	2,0	0,145	100
262274	light grey	2,75	4,5	2,6	2,75	19	1,65	0,047	100
262276	light grey	3,5	5,9	3,7	3,5	15	2,0	0,060	100
262278	light grey	4,0	6,6	4,2	4,0	18	2,5	0,091	100
262280	light grey	5,0	7,6	5,0	5,0	18	2,5	0,100	100
262282	light grey	6,0	9,0	6,6	6,0	18	2,5	0,106	100
262284	light grey	6,0	10,5	6,9	6,0	20	2,5	0,119	100
262286	light grey	7,0	11,0	7,5	7,0	22	2,5	0,128	100
262288	light grey	8,0	12,9	8,15	8,0	22	2,5	0,136	100
262290	light grey	9,0	12,0	9,0	9,0	22	2,5	0,138	100
262292	light grey	9,5	13,8	10,4	9,3	25	2,5	0,156	100
262294	light grey	11,0	16,6	12,2	11,0	27	2,5	0,234	100
262296	light grey	12,0	16,0	12,3	12,0	27	2,5	0,223	100
262298	light grey	14,0	20,5	15,6	14,0	35	3,0	0,345	100
262300	light grey	16,0	21,7	17,0	16,5	38	3,2	0,472	100
262302	light grey	18,0	22,0	17,5	18,0	38	3,2	0,457	100
262304	light grey	20,0	23,5	18,5	20,0	38	3,2	0,254	50
262306	light grey	22,0	27,8	23,0	22,0	42	3,2	0,321	50
262308	light grey	25,0	30,4	25,0	25,0	47	3,2	0,433	50
262310	light grey	32,0	40,0	33,5	32,0	56	3,6	0,306	25

NL = nail length
 N-Ø = nail diameter
 H = height
 H1 = height 1
 W = width (opening)

haupa®

...convincing solutions

Germany: HAUPA, Koenigstr. 165-169, 42853 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, sales@haupa.com