



020211.5L01.01 TINO LED 2500lm 3000K 20° white


Modern, interior spotlight equipped with LED light sources, available in two colour temperatures.

TECHNICAL DATA	Mounting: in 3-phase track Body: high pressure die-cast aluminum Colour: white Do not cover with insulating material: no
ELECTRICAL DATA	Power supply efficiency: >88% Power: 220-240V 50/60Hz Includes light source: yes Output current [mA]: 700 Type of equipment: ED Light source / lamp: LED
OPTICAL DATA	Light distribution: circular Way of lighting: direct Reflector: aluminum polished faceted CRI/Ra: ≥80 Beam angle: 20° Lumen LED [lm]: 3400 Lumen luminaire [lm]: 2500 Colour temperature [K]: 3000
GENERAL DATA	Lifetime (L70B50): 50 000 h Operating temperature range: 0° C ... +35° C Warranty: 5 years Application: boutiques, delicatessen, jeweler, shopping centers, supermarkets, museums



Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Beam angle	Colour
020211.5L01.01	27	30	3400	2500	83	3000	≥80	20°	white

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
020211.5L01.01	240 92 235	216	1	1,4

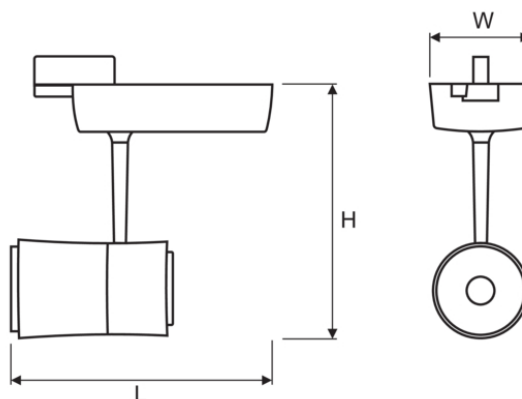

ACCESSORIES

150091.00121
 150092.00122
 150093.00123

Mounting bases



150091.00124
 150092.00125
 150093.00126

Recessed box

LIGHT BEAM CURVES**WAY OF LIGHTING**