

AURA 7

Product code: 59040

Type: LED-1L12C03BT12/012 3000#

Short description of the luminaire

White surface-mounted LED light ON/OFF with TRIPLEX OPAL glass shade.

Technical

Types of luminaires:	Classic on/off
Mounting type:	surface mounted
Base material:	steel
Shade material:	three-layer glass TRIPLEX OPAL
Shade color:	white
Holding the shade:	bayonet
Base color:	white Ral9003
Mounting location:	ceiling/wall
Width:	250 mm
Length:	250 mm
Height:	110 mm
Diameter:	∅ 250 mm
Energy class:	D
Impact strength:	IK01

Electric

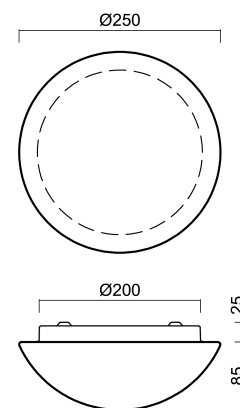
Voltage type:	AC
Input voltage:	220 - 240 V
Output:	9 W
IP:	44
Socket:	LED modul

Luminous








Lum. flux of luminaire:	700 lm
Lum. flux of light source:	1080 lm
Temperature:	3000 K
Rated life time LED L80/B10:	50000
CRI:	Ra80
MacAdam:	3

Logistic

EAN	8591728590406
Weight NTTO	1,3 Kg
Weight BTTO	1,5 Kg
Number of cartons	1
Package volume	0,008 m³
Package 1 width	0,27 m
Package 1 length	0,26 m
Package 1 height	0,11 m
Warranty:	60



Documents to download

0819-CE_LED-BT_NU_IP44_EN.pdf	
Care_maintenance_luminaires_2018.pdf	
Manipulation_with_LED_luminaires.pdf	
AURA_6-11_DATASHEET_2020_EN.pdf	
INSTALLATION_INSTRUCTIONS-bayonet_attachment_IN_E_LED_EN.pdf	
Jistice_Circuit_breaker.pdf	
AURA_7_LED-1L12C03BT12_012_3000_EN.Idt	

AURA 7

Product code: 51264

Type: LED-1L12B07BT12/012 3000#

Short description of the luminaire

White surface-mounted LED light ON/OFF with TRIPLEX OPAL glass shade.

Technical

Types of luminaires:	Classic on/off
Mounting type:	surface mounted
Base material:	steel
Shade material:	three-layer glass TRIPLEX OPAL
Shade color:	white
Holding the shade:	bayonet
Base color:	white Ral9003
Mounting location:	ceiling/wall
Width:	250 mm
Length:	250 mm
Height:	110 mm
Diameter:	ø 250 mm
Energy class:	D
Impact strength:	IK01

Electric


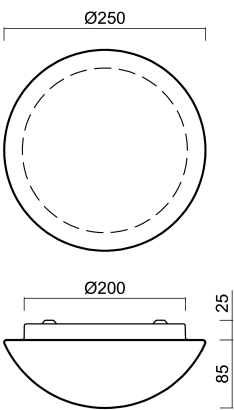
Voltage type:	AC
Input voltage:	220 - 240 V
Output:	10 W
IP:	44
Socket:	LED modul

Luminous








Lum. flux of luminaire:	840 lm
Lum. flux of light source:	1290 lm
Temperature:	3000 K
Rated life time LED L80/B10:	50000
CRI:	Ra80
MacAdam:	3

Logistic

EAN	8591728512644
Weight NTTO	1,3 Kg
Weight BTTO	1,5 Kg
Number of cartons	1
Package volume	0,008 m³
Package 1 width	0,27 m
Package 1 length	0,26 m
Package 1 height	0,11 m
Warranty:	60



Documents to download

0819-CE_LED-BT_NU_IP44_EN.pdf	
Care_maintenance_luminaires_2018.pdf	
Manipulation_with_LED_luminaires.pdf	
AURA_6-11_DATASHEET_2020_EN.pdf	
INSTALLATION_INSTRUCTIONS-bayonet_attachment_IN_E_LED_EN.pdf	
Jistice_Circuit_breaker.pdf	
AURA_7_LED-1L12B07BT12_012_3000_EN.Idt	

AURA 7

Product code: 59540

Type: LED-1L12C03BT12/012 4000#

Short description of the luminaire

White surface-mounted LED light ON/OFF with TRIPLEX OPAL glass shade.

Technical

Types of luminaires:	Classic on/off
Mounting type:	surface mounted
Base material:	steel
Shade material:	three-layer glass TRIPLEX OPAL
Shade color:	white
Holding the shade:	bayonet
Base color:	white Ral9003
Mounting location:	ceiling/wall
Width:	250 mm
Length:	250 mm
Height:	110 mm
Diameter:	∅ 250 mm
Energy class:	D
Impact strength:	IK01

Electric

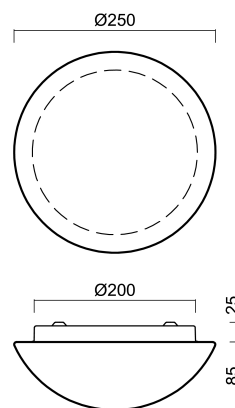
Voltage type:	AC
Input voltage:	220 - 240 V
Output:	9 W
IP:	44
Socket:	LED modul

Luminous








Lum. flux of luminaire:	740 lm
Lum. flux of light source:	1140 lm
Temperature:	4000 K
Rated life time LED L80/B10:	50000
CRI:	Ra80
MacAdam:	3

Logistic

EAN	8591728595401
Weight NTTO	1,3 Kg
Weight BTTO	1,5 Kg
Number of cartons	1
Package volume	0,008 m³
Package 1 width	0,27 m
Package 1 length	0,26 m
Package 1 height	0,11 m
Warranty:	60



Documents to download

0819-CE_LED-BT_NU_IP44_EN.pdf	
Care_maintenance_luminaires_2018.pdf	
Manipulation_with_LED_luminaires.pdf	
AURA_6-11_DATASHEET_2020_EN.pdf	
INSTALLATION_INSTRUCTIONS-bayonet_attachment_IN_E_LED_EN.pdf	
Jistice_Circuit_breaker.pdf	
AURA_7_LED-1L12C03BT12_012_4000_EN.Idt	

AURA 7

Product code: 51764

Type: LED-1L12B07BT12/012 4000#

Short description of the luminaire

White surface-mounted LED light ON/OFF with TRIPLEX OPAL glass shade.

Technical

Types of luminaires:	Classic on/off
Mounting type:	surface mounted
Base material:	steel
Shade material:	three-layer glass TRIPLEX OPAL
Shade color:	white
Holding the shade:	bayonet
Base color:	white Ral9003
Mounting location:	ceiling/wall
Width:	250 mm
Length:	250 mm
Height:	110 mm
Diameter:	ø 250 mm
Energy class:	D
Impact strength:	IK01

Electric

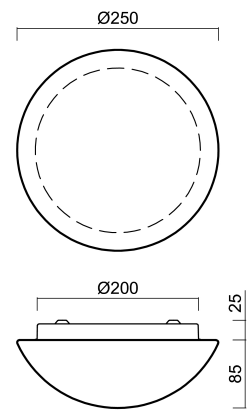
Voltage type:	AC
Input voltage:	220 - 240 V
Output:	10 W
IP:	44
Socket:	LED modul

Luminous

Lum. flux of luminaire:	880 lm
Lum. flux of light source:	1350 lm
Temperature:	4000 K
Rated life time LED L80/B10:	50000
CRI:	Ra80
MacAdam:	3

Logistic

EAN	8591728517649
Weight NTTO	1,3 Kg
Weight BTTO	1,5 Kg
Number of cartons	1
Package volume	0,008 m³
Package 1 width	0,27 m
Package 1 length	0,26 m
Package 1 height	0,11 m
Warranty:	60



Documents to download

0819-CE_LED-BT_NU_IP44_EN.pdf	
Care_maintenance_luminaires_2018.pdf	
Manipulation_with_LED_luminaires.pdf	
AURA_6-11_DATASHEET_2020_EN.pdf	
INSTALLATION_INSTRUCTIONS-bayonet_attachment_IN_E_LED_EN.pdf	
Jistice_Circuit_breaker.pdf	
AURA_7_LED-1L12B07BT12_012_4000_EN.Idt	