

Cover JUN-50

Ref. 17056_1.5



UGR
< 19



- Glare rating UGR < 19 possible
- High lumen output

APPLICATION

- LED protection, light diffusion and glare reduction in lighting fixtures


MONTAGE

- to the profile, by pressing


ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation

TECHNICAL DRAWING

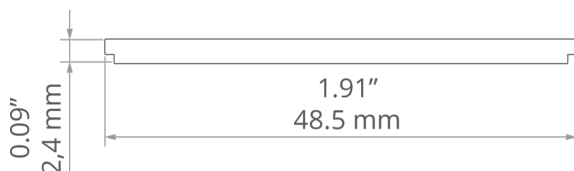


TECHNICAL SPECIFICATIONS

Color	 clear	Light transmission	92
Material	PMMA	Width	35 mm
Shape	flat	Glare rating reduction UGR<19	yes
Length	1500 mm	UV resistance	yes
Maximum length on request	3000 mm		


SAMPLE PROJECTS

Cover JUN-50


Ref. 17056_1.5

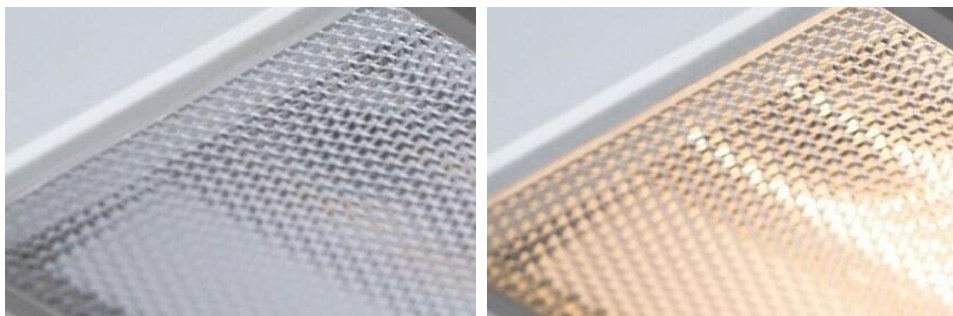

RELATED PROFILES




MOD-50
18047



OMODO-50
18053

RELATED SYSTEMS



MOD-50
18047



MOD-KOL-50
18060+18053



MOD-KOZE-50
18055+18053



MOD-TEK-50
18059+18053