



CorePro LEDspot MV



Corepro LEDspot 2.7-25W GU10 840 36D

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. These GU10 LED spot lights are compatible with most existing fixtures with a GU10 LED base and are designed as a retrofit replacement for halogen or incandescent spots. CorePro LEDspots deliver significant energy savings and minimize maintenance costs.

Product data

| General Information | |
|--|--------------------|
| Cap-Base | GU10 |
| Nominal lifetime | 15,000 hour(s) |
| Switching Cycle | 50,000 |
| Lighting Technology | LED |
| Flux measurement reference | Narrow Cone |
| | |
| Light Technical | |
| Color Code | 840 [CCT of 4000K] |
| Beam Angle (Nom) | 36 degree(s) |
| Luminous Flux | 230 lm |
| Luminous Intensity (Nom) | 500 cd |
| Color Designation | Cool White (CW) |
| Correlated Color Temperature (Nom) | 4000 K |
| Luminous Efficacy (rated) (Nom) | 85.00 lm/W |
| Color Consistency | <6 |
| Color rendering index (CRI) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Luminous Flux in 90° Cone (Rated) | 230 lm |
| Photobiological safety according to EN 62471 | RG1 |

| Operating and Electrical | |
|---------------------------|-------------|
| Line Frequency | 50 to 60 Hz |
| Input Frequency | 50 to 60 Hz |
| Power Consumption | 2.7 W |
| Lamp Current (Nom) | 29 mA |
| Wattage Equivalent | 25 W |
| Starting Time (Nom) | 0.5 s |
| Warm-up time to 60% light | 0.5 s |
| Power Factor (Fraction) | 0.5 |
| Voltage (Nom) | 220-240 V |
| | |
| Temperature | |
| T-Case Maximum (Nom) | 50 °C |
| | |
| Controls and Dimming | |
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Bulb Shape | PAR16 |
| Net Weight (Piece) | 0.045 kg |
| | |


Datasheet, 2025, March 17 data subject to change

CorePro LEDspot MV

| Approval and Application | | |
|--|--------|--|
| Energy Efficiency Class | F | |
| Suitable For Accent Lighting | Yes | |
| Energy Consumption kWh/1000 h | 3 kWh | |
| EPREL Registration Number | 391854 | |
| CE mark | Yes | |
| EU RoHS compliant | Yes | |
| EyeComfort | Yes | |
| Flickering value (PstLM) - Flickering value as per 1 | | |
| EN 61000-3-3 | | |
| Stroboscopic effect visibility measure (SVM) | 0.4 | |
| | | |
| Application Conditions | | |
| can it be used in closed luminaires | No | |
| | | |


| Product Data | |
|---------------------------------|----------------------------------|
| Order product name | Corepro LEDspot 2.7-25W GU10 840 |
| | 36D |
| Full product name | Corepro LEDspot 2.7-25W GU10 840 |
| | 36D |
| Full product code | 871869672831400 |
| Order code | 929001217702 |
| Material Nr. (12NC) | 929001217702 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8718696728314 |
| Numerator - Packs per outer box | 10 |
| EAN/UPC - Case | 8718696728321 |
| | |

Dimensional drawing




| Product | D | С |
|--------------------------------------|-------|-------|
| Corepro LEDspot 2.7-25W GU10 840 36D | 50 mm | 54 mm |

Photometric data






Accent Lighting Spots - Corepro LEDspot 2.7-25W GU10 840 36D



Light Distribution Diagram - Corepro LEDspot 2.7-25W GU10 840 36D


CorePro LEDspot MV


Photometric data

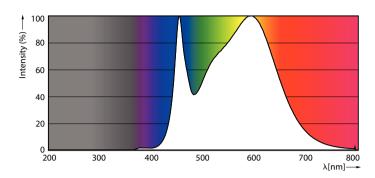

Spectral Power Distribution Colour - Corepro LEDspot 2.7-25W GU10 840 36D

Lifetime

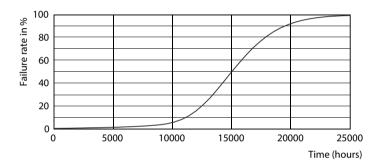

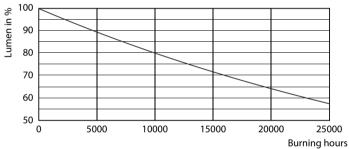

Life Expectancy Diagram

Lumen Maintenance Diagram - Corepro LEDspot 2.7-25W GU10 840 36D



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.