

PRODUCT DESCRIPTION**Closet Rated**

- No need to cut covers to fit the end caps
- Minimum profile size for a 0,39" / 10 mm LED strip
- Modern design

FINISH :Silver anodized ☐Black anodized ☐

Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION**Application**

- For creating lighting fixtures recessed in furniture boards.

Mounting

- With mounting adhesive.


Additional information

- the extrusion will fit in 0.47" / 12 mm thick drywall
- dimensions of the mounting channel for recessing the profile: 0,7" / 18mm x 0,3" / 7 mm (depth)
- the line of light obtainable with a LIGER cover and with a LED strip with a minimum of 36 LED/ft / 120 LED/m
- space for Led strip: 0.51" / 13 mm

AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
C1587K7_1	Black anodized	39.4"
C1587K7_2	Black anodized	78.75"
C1587ANODA_1	Silver anodized	39.4"
C1587ANODA_2	Silver anodized	78.75


TECHNICAL DRAWING

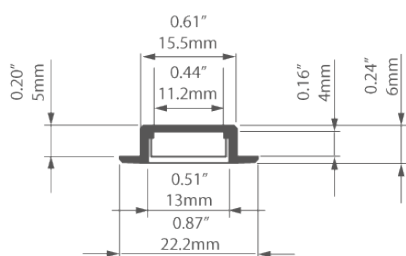


RELATED PRODUCTS

COVERS


BLACK




LIGER Cover
black
Ref: 17040





CLEAR COVERS




HS Cover clear
Ref: 1370




KA-PRO Cover
clear
Ref: 17065



KA Cover clear
Ref: 17036



FROSTED COVERS



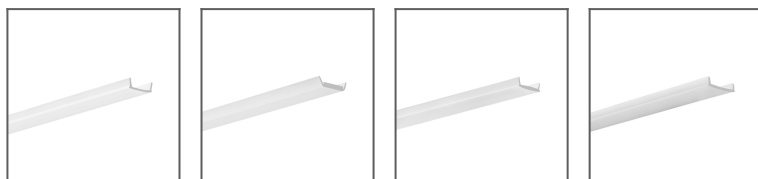


KA Cover frosted
Ref: 17035

HS Cover frosted
Ref: 1369


LIGER Cover
frosted
Ref: 17037 (Old
ref. 17031)

KA-PRO Cover
frosted
Ref: 17064



END CAPS

REGULAR END CAPS

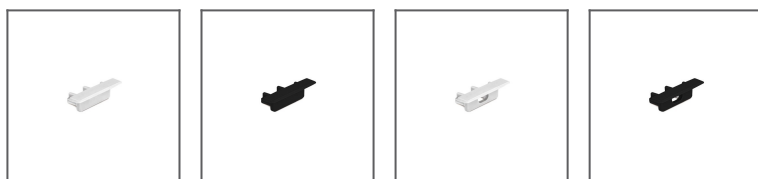

MICRO-NK End
cap
Ref: 24346

MICRO-NK black
End cap
Ref: 24362

MICRO-NK-OTW
End cap
Ref: 24347

MICRO-NK-OTW
black End cap
Ref: 24363

ACCESSORIES

ADDITIONAL ITEMS



6x1.2 Gland
Ref: 00802

LED TAPES

HIGH EFFICACY




K-HE-1920-HD-24V
Ref: K-HE-1920-
HD-24V


K-HE-0960-HD-24V
Ref: K-HE-0960-
HD-24V

K-HE-1440-HD-24V
Ref: K-HE-1440-
HD-24V

K-HE-0480-HD-24V
Ref: K-HE-0480-
HD-24V

CRI95+



K-CR-1210-24V
Ref: K-
CR-1210-24V




K-CR-1220-24V
Ref: K-
CR-1220-24V



K-CR-1275-24V
Ref: K-
CR-1275-24V



K-CR-1820-HD-24V
Ref: K-CR-1820-
HD-24V



K-CR-1910-HD-24V
Ref: K-CR-1910-
HD-24V




WP-K-CR-1210-24V
Ref: WP-K-
CR-1210-24V




WP-K-CR-1220-24V
Ref: WP-K-
CR-1220-24V




WP-K-CR-1275-24V
Ref: WP-K-
CR-1275-24V




K-CR-0530-HD-24V
Ref: K-CR-0530-
HD-24V

WHITE



K-1220-24V
Ref: K-1220-24




K-1275-12V
Ref: K-1275-12




K-1210-12V
Ref: K-1210-12




K-1210-24V
Ref: K-1210-24




K-1220-12V
Ref: K-1220-12



K-1820-HD-24V
Ref: K-1820-HD-24




K-1910-HD-24V
Ref: K-1910-
HD-24



K-1275-24V
Ref: K-1275-24



WP-K-1210-12V
Ref: WP-
K-1210-12



K-0530-HD-24V
Ref: K-0530-HD-24




WP-K-1220-12V
Ref: WP-K-1220-12




WP-K-1220-24V
Ref: WP-
K-1220-24



WP-K-1220-IP65-24V
Ref: WP-K-1220-
IP65-24V




WP-K-1275-12V
Ref: WP-
K-1275-12



WP-K-1275-24V
Ref: WP-
K-1275-24




WP-K-1210-24V
Ref: WP-
K-1210-24




WP-K-1640-HD-IP65-24
Ref: WP-K-1640-HD-
IP65-24




WP-K-1910-HD-IP65-24
Ref: WP-K-1910-HD-
IP65-24

RGB/ RGBW


K-1275-RGB-12V
Ref: K-1275-
RGB-12V



K-1530-RGB+W-24V
Ref: K-1530-
RGB+W-24V




K-1920-120-RGB-24V
Ref: K-1920-120-
RGB-24V



WP-K-1920-120-RGB-24V
Ref: WP-K-1920-120-
RGB-24V




K-1200-120-RGB-24V
Ref: K-1200-120-
RGB-24V



K-0700-120-RGB-24V
Ref: K-0700-120-
RGB-24V


ADJUSTABLE WHITE/ DIM TO WARM



K-22/50-1728-24V

Ref:


K-22/50-1728-24V



K-30/18-1770-24V

Ref:

K-30/18-1770-24V




K-30/18-1770-010V-24V

Ref:

K-30/18-1770-010V-24V

LONG RUN



K-LR-1000-24V

Ref: K-

LR-1000-24