


Sensor-switched LED floodlight

XLED slim

Anthracite

EAN 4007841 012052

Article number 012052



LED	4000 K								3 years
30 years (Ø 4,5h / day)	4000K neutral white	infrared sensor 160°	max. 8 m	IP44	2 - 1000 lux	2 sec - 70 min	ideal 2 m	energy saving	manufacturer's warranty steinel.de/garantie

Function description

Light meets elegance. Elegantly designed sensor LED floodlight XLED slim with 10,5 W, ideal for building entrances and pathways, pleasant and effective light (660 lm) requiring very little energy, sensor reach of up to 8 m, tilting range of +-30° (horizontal).

Technical specifications

Dimensions (L x W x H)	201 x 66 x 241 mm
Sensor Technology	passive infrared
Output	10,5 W
Interconnection	No
Luminous flux	660 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
With motion detector	Yes
Detection angle	160 °
Sneak-by guard	Yes
Reach, radial	r = 4 m (22 m ²)

Reach, tangential	r = 8 m (89 m ²)
Time setting	2 s – 70 Min.
Main light adjustable	No
Settings via	Potentiometers
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, transparent
Manufacturer's Warranty	3 years
Includes corner wall mount	No
PU1, net weight	0,549 kg
Version	Anthracite
PU1, EAN	4007841012052

Sensor-switched LED floodlight

XLED slim


Anthracite

EAN 4007841 012052

Article number 012052



Detection Zone

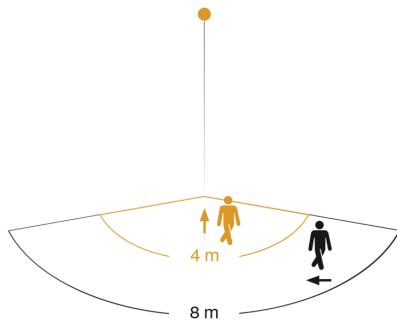

Mögliche Montagehöhe: –

Orange: radial

Schwarz: tangential

Dimension Drawing

