

# PRODUCT FAMILY DATASHEET

## DAMPPROOF IP65

Damp-proof luminaires, classic shape



---

### AREAS OF APPLICATION

- Industrial and storage facilities
- Car parks and underpasses
- Garages
- Workshops, assembly lines

---

### PRODUCT BENEFITS

- Evenly distributed light
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- Easy installation, no tools required for connection
- 5 years guarantee

---

### PRODUCT FEATURES

- High luminous efficacy: up to 115 lm/W
- Beam angle: 105°






TECHNICAL DATA

Product description	Electrical data			Photometrical data				Light technical data	Dimensions & weight			
	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	Length	Width	Height	Product weight
DP 1200 21 W 4000K IP65 GY	21.00 W	220...240 V	50/60 Hz	4000 K	2400 lm	Cool White	>80	105 °	1200 mm	95.0 mm	78.0 mm	1650.00 g
DP 1200 39 W 4000K IP65 GY	39.00 W	220...240 V	50/60 Hz	4000 K	4400 lm	Cool White	>80	105 °	1200 mm	95.0 mm	78.0 mm	1650.00 g
DP 1200 39 W 6500K IP65 GY	39.00 W	220...240 V	50/60 Hz	6500 K	4400 lm	Cool Daylight	>80	105 °	1200 mm	95.0 mm	78.0 mm	1650.00 g
DP 1500 30 W 4000K IP65 GY	30.00 W	220...240 V	50/60 Hz	4000 K	3500 lm	Cool White	>80	105 °	1500 mm	95.0 mm	78.0 mm	2300.00 g
DP 1500 55 W 4000K IP65 GY	55.00 W	220...240 V	50/60 Hz	4000 K	6400 lm	Cool White	>80	105 °	1500 mm	95.0 mm	78.0 mm	2300.00 g
DP 1500 55 W 6500K IP65 GY	55.00 W	220...240 V	50/60 Hz	6500 K	6400 lm	Cool Daylight	>80	105 °	1500 mm	95.0 mm	78.0 mm	2300.00 g

Product description	Colors & materials			Temperatures & operating conditions	Lifespan		
	Body material	Product color	Cover material	Ambient temperature range	Lifespan L70 at 25 °C	Lifespan L80 at 25 °C	Lifespan L90 at 25 °C
DP 1200 21 W 4000K IP65 GY	Polycarbonate (PC)	Gray	Polycarbonate (PC)	-30...40 °C	50000 h	35000 h	20000 h
DP 1200 39 W 4000K IP65 GY	Polycarbonate (PC)	Gray	Polycarbonate (PC)	-30...40 °C	50000 h	35000 h	20000 h
DP 1200 39 W 6500K IP65 GY	Polycarbonate (PC)	Gray	Polycarbonate (PC)	-30...40 °C	50000 h	35000 h	20000 h
DP 1500 30 W 4000K IP65 GY	Polycarbonate (PC)	Gray	Polycarbonate (PC)	-30...40 °C	50000 h	35000 h	20000 h
DP 1500 55 W 4000K IP65 GY	Polycarbonate (PC)	Gray	Polycarbonate (PC)	-30...40 °C	50000 h	35000 h	20000 h
DP 1500 55 W 6500K IP65 GY	Polycarbonate (PC)	Gray	Polycarbonate (PC)	-30...40 °C	50000 h	35000 h	20000 h

Product description	Capabilities			Certificates & standards	
	Dimmable	Type of connection	Ball shot safe	Protection class	Type of protection
DP 1200 21 W 4000K IP65 GY	No	Screwless terminal, 3-Pole	No	I	IP65
DP 1200 39 W 4000K IP65 GY	No	Screwless terminal, 3-Pole	No	I	IP65
DP 1200 39 W 6500K IP65 GY	No	Screwless terminal, 3-Pole	No	I	IP65

Product description	Capabilities			Certificates & standards	
	Dimmable	Type of connection	Ball shot safe	Protection class	Type of protection
DP 1500 30 W 4000K IP65 GY	No	Screwless terminal, 3-Pole	No	I	IP65
DP 1500 55 W 4000K IP65 GY	No	Screwless terminal, 3-Pole	No	I	IP65
DP 1500 55 W 6500K IP65 GY	No	Screwless terminal, 3-Pole	No	I	IP65

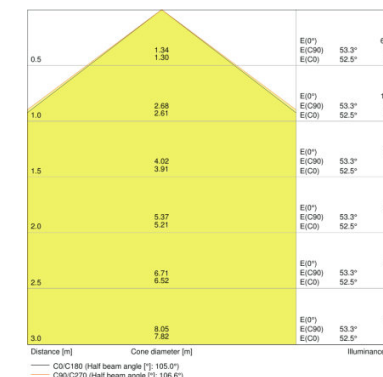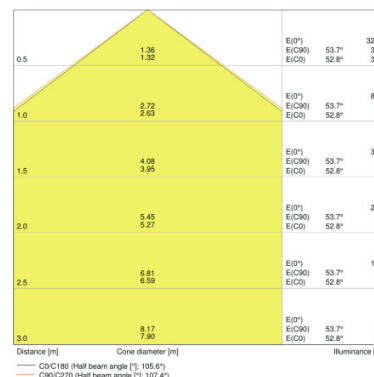


DP 1200 21 W 4000K IP65 GY, DP 1200 39 W 4000K IP65 GY, DP 1200 39 W 6500K IP65 GY


DP 1500 30 W 4000K IP65 GY, DP 1500 55 W 4000K IP65 GY, DP 1500 55 W 6500K IP65 GY

DP 1200 21 W 4000K IP65 GY


DP 1200 39 W 4000K IP65 GY

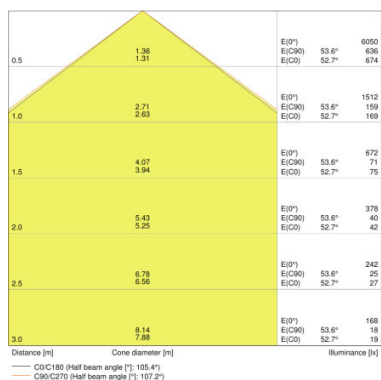


DP 1200 39 W 6500K IP65 GY

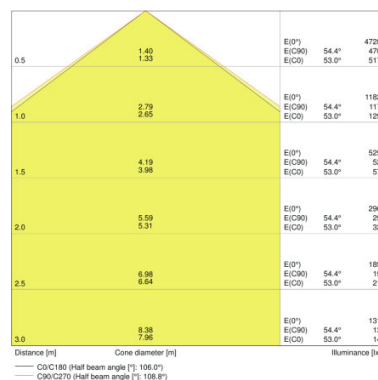

DP 1500 30 W 4000K IP65 GY

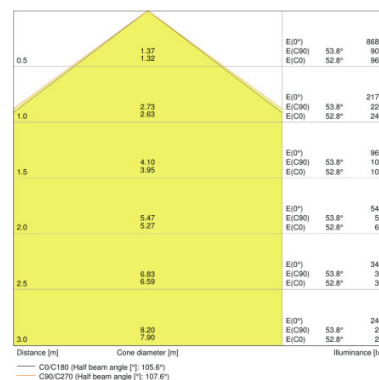

DP 1500 55 W 4000K IP65 GY

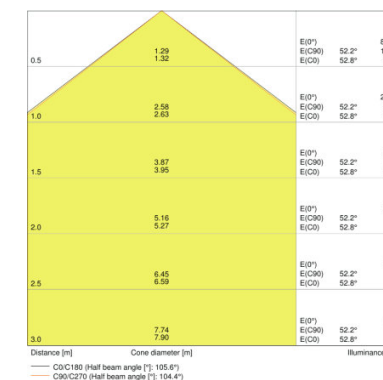

DP 1500 55 W 6500K IP65 GY

**EQUIPMENT / ACCESSORIES**

- Stainless steel clamps with safety screws included
- Mounting accessories included (suspension kit, theft protection kit)

**APPLICATION ADVICE**

For more detailed application information and graphics please see product datasheet.

**LOGISTICAL DATA**

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075079892	DP 1200 21 W 4000K IP65 GY	Shipping carton box 6	1225 mm x 333 mm x 192 mm	78.32 dm <sup>3</sup>	11992.00 g
4058075079915	DP 1200 39 W 4000K IP65 GY	Shipping carton box 6	1225 mm x 333 mm x 192 mm	78.32 dm <sup>3</sup>	11992.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075079854	DP 1200 39 W 6500K IP65 GY	Shipping carton box 6	1225 mm x 333 mm x 192 mm	78.32 dm <sup>3</sup>	11992.00 g
4058075079939	DP 1500 30 W 4000K IP65 GY	Shipping carton box 6	1525 mm x 333 mm x 192 mm	97.50 dm <sup>3</sup>	16355.00 g
4058075079953	DP 1500 55 W 4000K IP65 GY	Shipping carton box 6	1525 mm x 333 mm x 192 mm	97.50 dm <sup>3</sup>	16355.00 g
4058075079878	DP 1500 55 W 6500K IP65 GY	Shipping carton box 6	1525 mm x 333 mm x 192 mm	97.50 dm <sup>3</sup>	16355.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.