



CorePro LEDbulb

CorePro LEDbulb ND 5.5-40W A60 E27 827

Delivering a warm, halogen-like accent beam, LEDspots are a perfect fit for spot lighting and have a broad compatibility with transformers. LEDspots are compatible with most existing fixtures with a GU10 / MR16 GU5.3 / E14 holder and are designed as a retrofit replacement for halogen or incandescent spots. LEDbulbs are compatible with existing fixtures with an E27 holder and are designed for retrofit replacement of incandescent bulbs. LEDcandle and LEDcluster are compatible with existing fixtures with an E27/E14 holder and are designed for retrofit replacement of incandescent lamps. LEDlamps deliver huge energy savings and minimize maintenance cost

Product data

General Information	
Cap base	E27 [E27]
Nominal lifetime (nom.)	15000 h
Switching cycle	50000X
Technical type	5.5-40W
Light Technical	
Colour code	827 [CCT of 2700K]
Beam Angle (Nom)	200 °
Luminous flux (nom.)	470 lm
Luminous flux (rated) (nom.)	470 lm
Colour designation	Warm white (WW)
Correlated colour temperature (nom.)	2700 K
Luminous efficacy (rated) (nom.)	85.45 lm/W
Colour consistency	<6
Color rendering index (nom.)	80
LLMF at end of nominal lifetime (nom.)	70 %


Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	5.5 W
Lamp current (nom.)	48 mA
Wattage equivalent	40 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	80 °C
Controls and Dimming	
Dimmable	No

CorePro LEDbulb

Mechanical and Housing	
Bulb finish	Frosted (FR)
Approval and Application	
Energy efficiency label (EEL)	A+
Energy Consumption kWh/1000 h	6 kWh
Product Data	
Full product code	871869657757800

Order product name	CorePro LEDbulb ND 5.5-40W A60 E27 827
EAN/UPC – product	8718696577578
Order code	57757800
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001234202
Net weight (piece)	0.076 kg




Dimensional drawing




Entrybulb 230V 6W-40W 470lm 2700K E27 ND

Product	D	C
CorePro LEDbulb ND 5.5-40W A60 E27 827	60 mm	110 mm


Photometric data

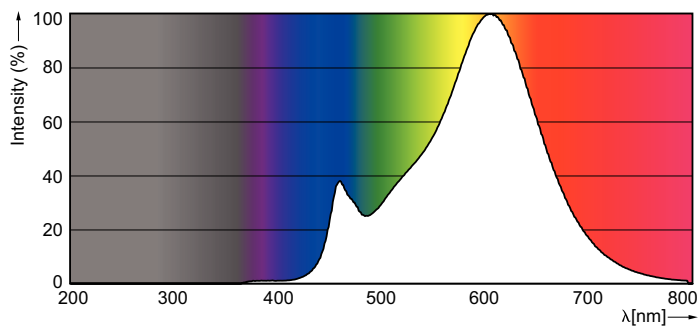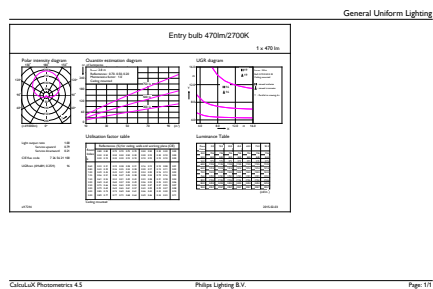

Lifetime

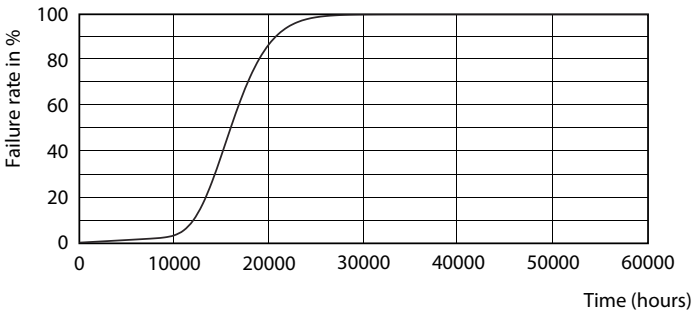

LEDbulb 40W E27 830 FR A60

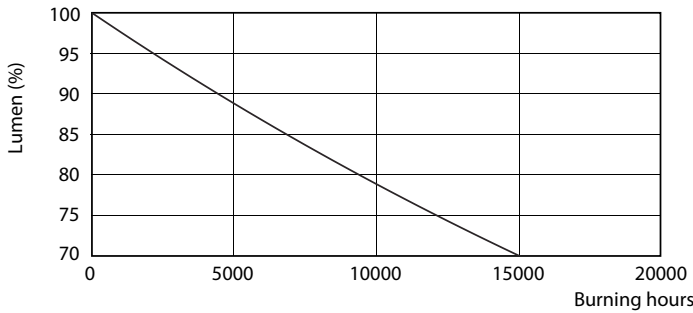

LEDbulb 40W E27 830 FR A60

