



# Ledinaire surface-mounted SM065C

## SM065C 41S/840 PSU W60L60 NOC 4PK

Ledinaire surface-mounted SM065C, 34 W, 4100 lm, 4000 K

The Philips Ledinaire surface-mounted (SM065C) range features a selection of popular off-the-shelf LED luminaires that offer Philips high quality at a competitive price. Reliable, energy-efficient and affordable, this latest generation of 600 x 600 mm Ledinaire LED surface-mounted lights are designed for diffuse, comfortable lighting in a wide range of general lighting applications—just what you need.

### Product data

General Information	
Number of gear units	1 unit
Driver included	Yes
Value ladder	Value
Warranty period	3 years
Sustainability rating	-
Light Technical	
Luminous Flux	4,100 lm
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	120 lm/W
Color rendering index (CRI)	>80
Beam angle of light source	120 degree(s)
Light source color	840 neutral white
Optic type	Beam angle 120°
Luminaire light beam spread	120°


Unified glare rating CEN	22
Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Initial CLO power consumption	- W W
Average CLO power consumption	- W W
Inrush current	17.8 A
Inrush time	0.287 ms
Power Consumption	34 W
Power Factor (Fraction)	0.9
Connection	Flying leads/wires
Cable	2x0.75mm²
Number of products on MCB of 16 A type B	20
Suitable for random switching	Not applicable
Protection class IEC	Safety class II

Ledinaire surface-mounted SM065C

Total harmonic distortion	20 %
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit external (On/Off)
Control interface	-
Constant light output	No
Maximum dim level	Not applicable
Mechanical and Housing	
Housing Material	Steel
Reflector material	Acrylate
Optic material	Polystyrene
Optical cover material	Acrylate
Fixation material	-
Housing Color	White
Optical cover finish	Opal
Overall length	595 mm
Overall width	595 mm
Overall height	40 mm
Dimensions (Height x Width x Depth)	40 x 595 x 595 mm
Ingress protection code	IP20/40 [Finger-protected;Wire-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Net Weight (Piece)	1.600 kg
Emergency Operation	
Central Emergency	No
Approval and Application	
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	-
Photobiological risk	Photobiological risk group 0 @200mm to EN62778

Photobiological risk specification	0.2 m
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Ambient temperature range	-10 to +35 °C
Initial Performance (IEC Compliant)	
Luminous flux tolerance	-10% / +10%
Initial chromaticity	(0.38, 0.38) SDCM ≤5
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤5
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 50000 h	7.5 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L80
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 75000 h	L70
Product Data	
Order product name	SM065C 41S/840 PSU W60L60 NOC 4PK
Full product name	SM065C 41S/840 PSU W60L60 NOC 4PK
Full product code	872016973691799
Order code	911401892385
Material Nr. (12NC)	911401892385
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169736917
Numerator - Packs per outer box	4
EAN/UPC - Case	8720169736917

Dimensional drawing

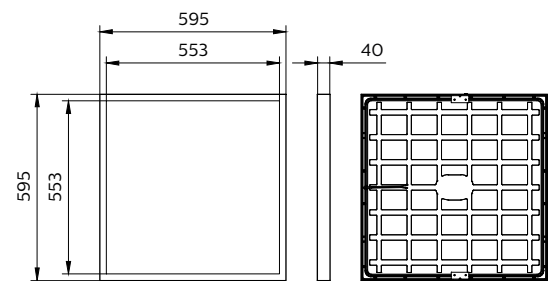

## Ledinaire surface-mounted SM065C

