



# MASTER VALUE LEDspot MV

## MAS LEDspotMV D 4-35W GU10 927 40D

Delivering a warm, halogen-like accent beam, MASTER VALUE LEDspot MV is a perfect for spot lighting. Thanks to its high CRI, it realizes more natural colors, enabling cozy and comfortable ambience for residential, hospitality and emphasize the beauty of merchandise in retail. These LEDspots have the familiar look and feel of glass spots, keeping the classic beauty of glass spots and adding the strong performance from LED technology. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers.

### Product data

General Information	
Cap-Base	GU10 [ GU10]
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
Technical Type	4-35W
Light Technical	
Color Code	927
Beam Angle (Nom)	40 °
Light Distribution	Wide beam 40°
Luminous Flux (Nom)	279 lm
Luminous Flux (Rated) (Nom)	279 lm
Luminous Intensity (Nom)	560 cd
Color Designation	Warm White (WW)
Rated Beam Angle	40 °
Correlated Color Temperature (Nom)	2700 K

Luminous Efficacy (Rated) (Nom)	65.50 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	262 lm
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	4 W
Lamp Current (Nom)	21 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	instant full light
Power Factor (Nom)	0.84
Voltage (Nom)	220-240 V

# MASTER VALUE LEDspot MV

## Temperature

T-Case Maximum (Nom)	90 °C
----------------------	-------

## Controls and Dimming

Dimmable	Yes
----------	-----

## Approval and Application

Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	A+
Energy Consumption kWh/1000 h	4 kWh


## Product Data

Full product code	871869645729000
Order product name	MAS LEDspotMV D 4-35W GU10 927 40D
EAN/UPC - Product	8718696457290
Order code	929001139302
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001139302
Net Weight (Piece)	0.036 kg

## Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


## Dimensional drawing




LED D 4-35W GU10 927 40D

Product	D	C
MAS LEDspotMV D 4-35W GU10 927 40D	50 mm	57 mm

## Photometric data



4-35W GU10 /927 40D

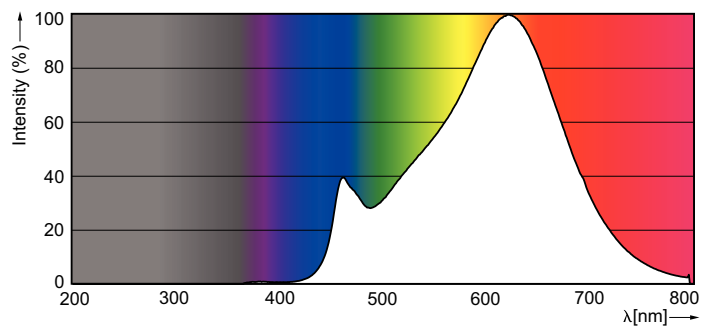

GU10 /927

## MASTER VALUE LEDspot MV

